



## ■ Description


Sealed enclosure with two M20 cable glands for input and output.

Optional accessory for the Casambi/DALI controller: CBU-DA-1P and other Casambi white products.

## ■ Specifications

<b>Rated Voltage</b>	400Vac
<b>Isolation</b>	2500Vac
<b>Working temperature range</b>	-40°C to +105°C
<b>IP Protection level</b>	IP66. (IP68 non-permanent)
<b>Cable diameter</b>	9-12mm
<b>Materials</b>	Box: PA66 with anti UV treatment Seal: Silicone Screws: Stainless steel 304
<b>Fire resistance, flammability</b>	UL-94 V-0
<b>Dimensions (Length*Width*Height)</b>	131 x 68 x 37mm
<b>Certificates</b>	CE / TUV / RCM

## ■ External dimensions

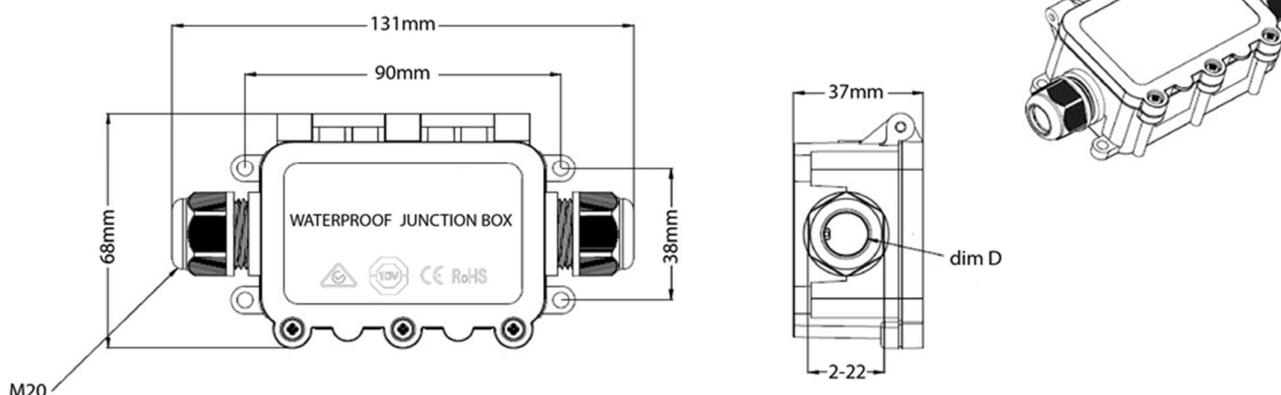

- **Internal dimensions**



Note: For use with the CBU-DA-1P and other similar size devices, the centre plastic pin of the housing must be cut off. This pin is used to secure a standard terminal block, which is not included.